



ICY BOX IB-DK4032-CPD

Combo adapter for notebooks

Key features

- Extends 1x USB Type-C™ to 3x further interfaces
- Input (to Notebook / PC): USB 3.0 Type-C™
- Output:
 - 1x USB 3.0 Type-A (backwards compatible to USB 2.0)
 - 1x VGA (up to 1920x1200@60Hz)
 - 1x USB Type-C™ power input to charge notebooks



Packing content
1x IB-DK4032-CPD

Technical data


| | |
|-------------------------|---|
| Model | IB-DK4032-CPD |
| Article no. | 60072 |
| EAN | 4250078164098 |
| Brand | ICY BOX |
| Colour | Black |
| Material | PC/ABS |
| Chipset | Main Chipset (Video): Parade PS176 Main Chipset (HUB controller): VIA-Labs VL210-Q4 QFN-48 VL100 DP Alt-mode Type-C™ Controller QFN-40s |
| Input interface | 1x USB Type-C™ (UFP) from Host PC |
| Output interface | 1x USB Type-C™ (DFP), only for PC power delivery up to 20V@3A 1x VGA, 1x USB 3.0 Type-A (DFP) |

| | |
|----------------------------|--|
| Transfer rate | USB 3.0 up to 5 Gbit/s |
| VGA resolution | Up to 1920x1200@60Hz |
| Power supply | Bus powered via USB Type-C™ port |
| Operating system | Windows®, macOS®, Chrome OS |
| System requirements | PC with USB Type-C™ interface supporting VESA® DisplayPort alternate mode |

DisplayPort™ and the DisplayPort™ logo are trademarks owned by the Video Electronics Standards Association (VESA®) in the United States and other countries. The terms HDMI® and HDMI® High-Definition Multimedia Interface, and the HDMI® logo are trademarks or registered trademarks of HDMI® LA, Inc. in the United States and other countries.



ICY BOX **IB-DK4032-CPD** Combo adapter for notebooks

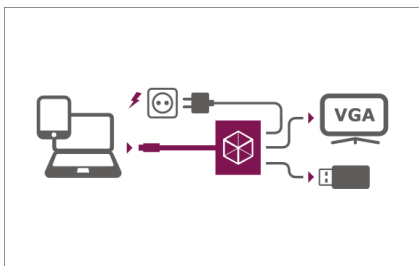


The Allrounder

The new USB Type-C™ connector is not only twist-proof, it also offers driverless conversion for video and audio formats, simultaneous data transmission and the possibility to load the host device at the same time. Thanks to its slim design The USB Type-C™ interface is a must for any Next-Gen mobile device, from smart-phone to notebook



Uncomplicated 3-in-1 adapter

You can charge your supported notebook by plugging in the USB Type-C™ charging adapter, while an additional VGA device (TV, monitor, beamer, etc.) and an external USB device can be used. There is no need to install additional drivers, just plug and play.

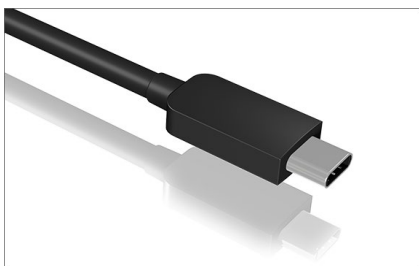

Powerful lightweight

With the glossy black plastic housing and a weight of just 43 grams, this performance package remains an elegantly unobtrusive companion, which reliably fulfills its tasks in every setup.

Logistical data

Packing unit: 9 pcs./carton
Total weight: 8.20 kg/carton
Gross weight (with packing): 0.121 kg
Net weight: 0.043 kg

Dimension/carton: 418x325x305 mm
Dimension (with packing): 200x105x25 mm
Dimension of article: 50x69x15w mm
Country of origin: China

