ICY BOX
IB-DK4033-CPD

USB Type-C™ notebook DockingStation

Key features

- USB Type-C™ notebook DockingStation with five additional interfaces
- **Input** (to notebook / PC): USB 3.0 Type-C™
- **Output**: 1x High Speed HDMI® Type-A (up to 3840x2160@30 Hz)
  1x VGA (up to 1920x1200@60 Hz)
  1x USB 3.0 Type-A (USB 3.0 downward compatible to USB 2.0)
  1x Ethernet RJ45
  1x USB Type-C™ with Power Delivery (max. 20 V@3 A) or data transfer function
- Mirroring and extending of the notebook display via HDMI®
- Bus powered, no power supply necessary

Packing content
1x IB-DK4033-CPD, 1x quick installation guide

Notebook DockingStation

The USB Type-C™ notebook DockingStation is designed for extra connectivity demands of a notebook or computer. With the IB-DK4033-CPD, you can extend the USB Type-C™ connection of a computer to one more HDMI® or VGA display, Ethernet network, USB peripherals, and USB Power Delivery (PD) function via the USB Type-C™ interface.
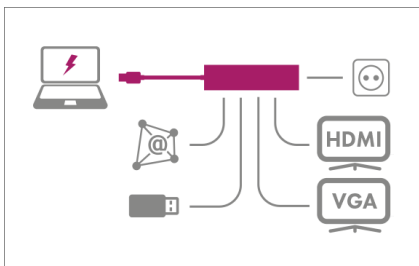
Technical data

Model	IB-DK4033-CPD	**Output interface**	1x High Speed HDMI®, 1x VGA, 1x USB 3.0 Type-A, 1x Ethernet RJ45, 1 x USB Type-C™ for Power Delivery or data transfer
Article no.	60212		
EAN / GTIN code	4250078165514	**Data transfer rate**	Up to 5 Gbit/s
Brand	ICY BOX	**Video**	One video output at a time: HDMI® or VGA
Colour	Black	**HDMI®**	Up to 3840x2160@30 Hz
Material	PC + ABS + aluminium	**VGA**	Up to 1920x1200@60 Hz
Chipset	GL3522, PS176, RTL8153, EJ898C, TS3DV642, RTD2168, EFM8UB20F32G	**LAN**	Gigabit LAN up to 1000 Mbit/s
		Power supply	Bus powered via USB Type-C™ port
Input interface	USB Type-C™ (UFP) from host PC	**Operating system**	Windows® 10 and above, macOS® 10.11.x and above
	USB Type-C™ (DFP) to host PC, for PC power delivery up to 20 V@3 A, video and data transfer function	**System requirements**	PC with USB Type-C™ interface supporting DisplayPort™ Alt Mode

ICY BOX **IB-DK4033-CPD**
USB Type-C™ notebook DockingStation

A bit of everything

With a USB Type-C™ host, the door is opened for four additional ports, 1x Gigabit Ethernet, 1x VGA, 1x HDMI® and 1x USB 3.0 Type-A will become available. But only one of the video ports can be used at a time.

Good input

USB Type-C™ is the new standard for PCs, notebooks, tablets and the like. The high data transfer rate of the USB 3.0 protocol of up to 5 Gbit/s serves this adapter very well and allows the VGA and HDMI® ports to reach resolutions of up to 1920x1200 and 3840x2160 respectively.

Work and charge

Your Notebook can be both connected to the adapter and charge its battery at the same time if you connect the Type-C™ power adapter. This allows for long working sessions without any risk of power shortage. When there is no need to charge anything, the Type-C™ port is an extra port for data transfer.

Logistical data

Packing unit:	40 pcs./carton	**Dimension/carton:**	478x223x305 mm
Total weight:	8.1 kg/carton	**Dimension** (with packing)**:**	200x105x25 mm
Gross weight: (with packing)**:**	0.183 kg	**Dimension of article:**	122x45x20 mm
Net weight:	0.099 kg	**Country of origin:**	China

RaidSonic
T e c h n o l o g y   G m b H